

G.MILANI S.A.S.

DI TETTONI FABRIZIO & C.

VIA CAVAGLIETTO, 25

28010 - CAVAGLIO D'AGOGNA NO (ITALIA)


P.IVA: 02626650036

SDI: W7YVJK9

MAIL: INFO@GMILANI.IT

PEC: G.MILANISAS@PEC.IT

TEL: +39.0322.80.68.20

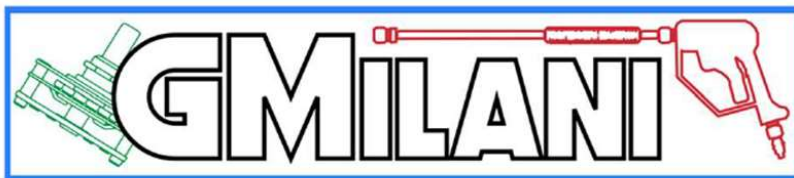

EQUIPMENT FOR COLD WATER PRESSURE WASHERS TLR 4 FLW



Characteristics:

- Power supply 230Vac / 400Vac 50/60Hz
- For three-phase motors up to 4Kw – 5.5Hp
- For single-phase motors up to 3Kw – 4Hp
- Low voltage pressure switches
- Connections via 6.3mm faston
- Overall dimensions: (L x W x H) 86 x 52 x 46mm
- Weight: 380g

The product was specifically designed for the management and control of cold water pressure washers.

It has the function of a simple timer for the management of the pump motor, with a standard timing set at 7 seconds.


Unlike all other TLR models, the FLW versions do not have the initial TOTALSTOP to bring the system under pressure when the card is powered. The pump will be activated only when the pressure switch inputs are closed.

Operating characteristics:

Pump motor output controlled internally by 3 Relays.


Electronic card drowned in epoxy resin to eliminate the problem of dust and humidity.

MADE IN ITALY

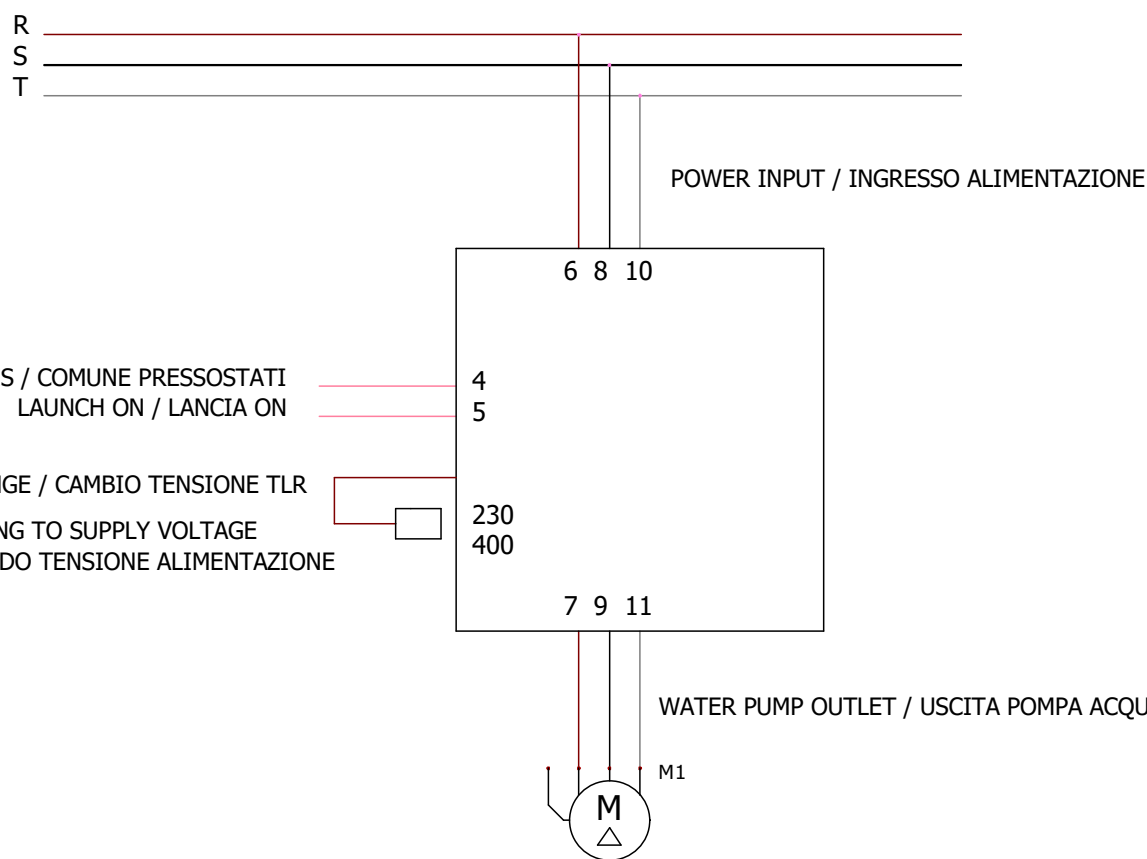


M1 -Water pump outlet / Uscita pompa acqua
In single phase do not use 10-11 / In monofase non usare 10-11

P1 - Pressure switch generally mounted on the pump / Pressostato generalmente monatato su Pompa
P2 - Pressure switch generally mounted on Bypass Valve / Pressostato generalmente montato su Valvola Bypass

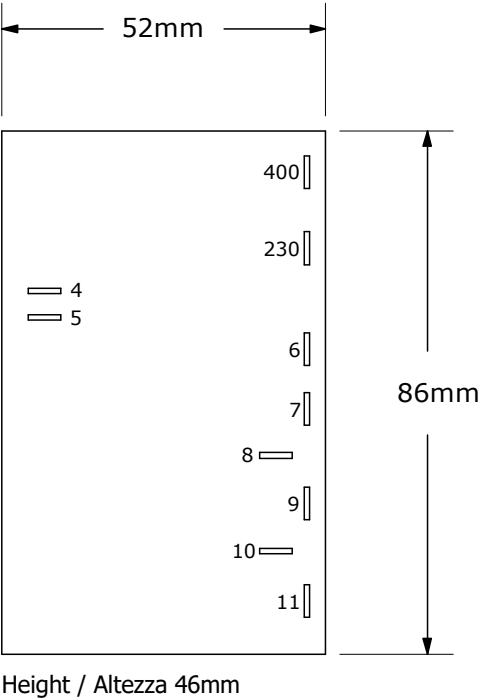

Example of pressure switch connection
Esempio collegamento pressostati

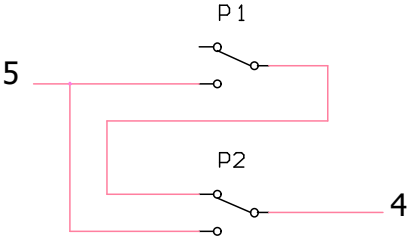


TLR4 FLW

REV. DATE

DESIGNED
G.Milani

G.MILANI S.a.s
DI TETTONI FABRIZIO & C.
VIA CAVAGLIETTO, 25
28010 - CAVAGLIO d'AGOGNA NO (ITALIA)
mail: **INFO@GMILANI.IT**
tel: **+39.0322.80.68.20**



SCHEME

CONTRACT: