

G.MILANI S.A.S.

DI TETTONI FABRIZIO & C.

VIA CAVAGLIETTO, 25

28010 - CAVAGLIO D'AGOGNA NO (ITALIA)


P.IVA: 02626650036

SDI: W7YVJK9


MAIL: INFO@GMILANI.IT

PEC: G.MILANISAS@PEC.IT

TEL: +39.0322.80.68.20

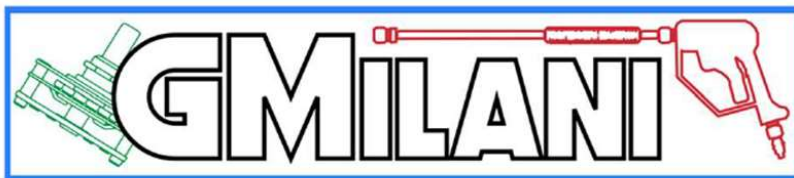

ADJUSTABLE TIMER TMA24

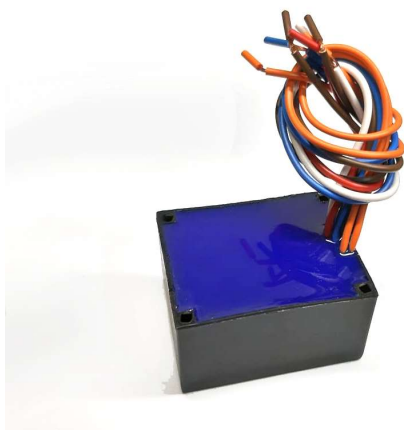

Characteristics:

-
- 24Vac 50/60Hz power supply
- NC contact relay max capacity 6A 230Vac
- Time adjustment between 5 and 55 sec
- Connections via 0.5mm cables
- Overall dimensions: (L x W x H) 50 x 40 x 25mm
- Weight: 80g

The TMA24 device is a simple but very useful timer, adjustable between 5 and 55 seconds via a 100Kohm potentiometer/trimmer to be connected externally (not supplied as standard, request if necessary) that counts the set seconds when the button input closes and when they are reached activates the relay, opening the contacts, permanently disabling the connected load. Remove power for a few seconds to reset.

If the button input opens before the set timing is reached, the count is reset.

The version with fixed non-adjustable timing is also available on request, which is pre-adjusted internally.

Operational characteristics:

Connections via colored FS17 cables, length approximately 18cm.


The electronic board is drowned in epoxy resin to eliminate the problem of dust and humidity.

MADE IN ITALY

TIMER BUTTON INPUT / INGRESSO PULSANTE TIMER


TIME ADJUSTMENT TRIMMER 100k Ohm from 5" to 55" /
TRIMMER REGOLAZIONE TEMPO 100k Ohm da 5" a 55"

IN THE VERSION WITH FIXED TIME, BROWN CABLES NOT FITTED /
NELLA VERSIONE CON TEMPISTICA FISSA, CAVI MARRONI NON MONTATI

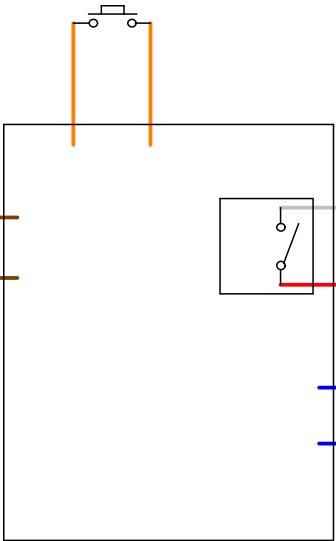

RELAY OUTPUT DRY CONTACTS NC /
USCITA RELÈ CONTATTI PULITI NC

POWER INPUT / INGRESSO ALIMENTAZIONE
24Vac 50/60Hz

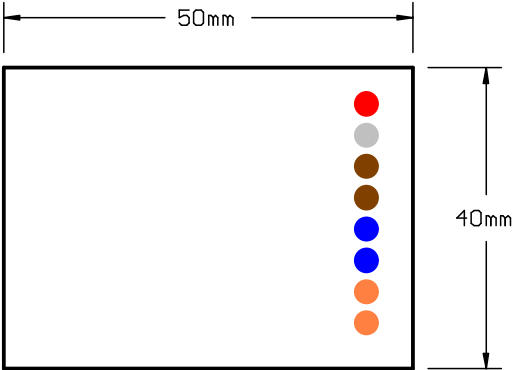


TMA24

REV. DATE

DESIGNED
G.Milani

G.MILANI S.a.s
DI TETTONI FABRIZIO & C.
VIA CAVAGLIETTO, 25
28010 - CAVAGLIO d'AGOGNA NO (ITALIA)
mail: **INFO@GMILANI.IT**
tel: **+39.0322.80.68.20**



SCHEME

CONTRACT: